




Terminal for wiring

WT series (1000pcs/pack)

- For wiring by wrapping or one-point attaching of electric wire, fitting of CR, checking, etc.
- Material: Brass
- Finish: Gold plating over nickel base

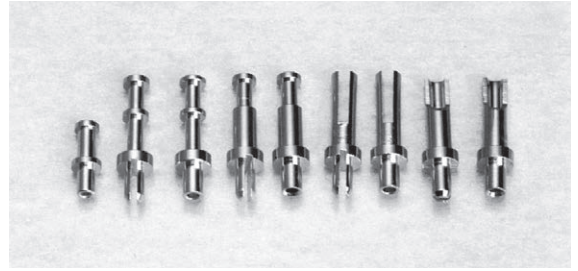

*The press-fitting type is provisionally fixed for soldering. Please be sure to carry out soldering.
 *Please carry out soldering for the crimping type.

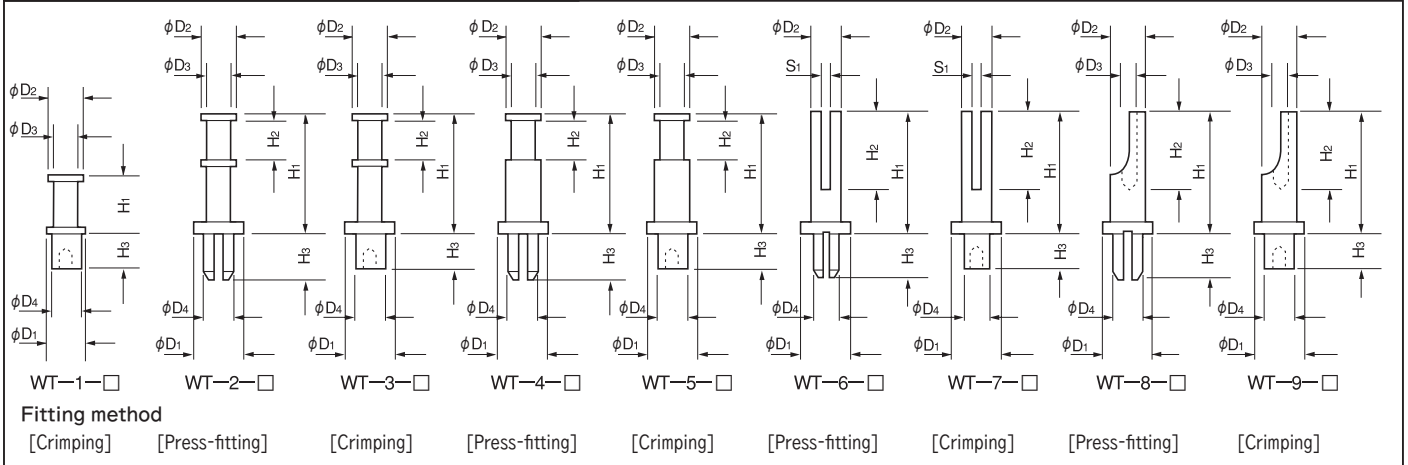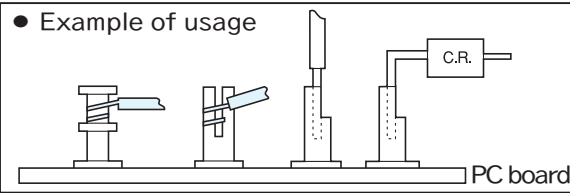

■ Table of dimensions

Part No.	D ₁	D ₂	D ₃	D ₄	H ₁	H ₂	H ₃	Printed board fitting hole diameter	Press-fitting tool edge chip
WT-1-1	2.5	2.0	1.5	1.5	3.95	—	2.35	φ 1.6	
WT-1-2	3.0	2.0	1.5	1.7	5.35	—	2.35	φ 1.8	
WT-1-3	3.5	2.8	1.7	1.9	6.65	—	2.35	φ 2.0	
WT-2-1	3.0	2.2	1.3	1.62	8.0	2.5	3.0	φ 1.6	P-7
WT-2-2	3.0	2.2	1.3	1.62	8.0	3.5	3.0	φ 1.6	P-8
WT-2-3	4.0	3.0	1.8	2.02	8.5	4.0	3.0	φ 2.0	
WT-2-4	4.0	3.0	1.8	2.02	8.5	4.0	4.5	φ 2.0 [*1]	
WT-3-1	3.0	2.2	1.3	1.7	8.0	2.5	2.5	φ 1.8	P-7
WT-3-2	3.0	2.2	1.3	1.7	8.0	3.5	2.5	φ 1.8	
WT-3-3	4.0	3.0	1.8	1.9	8.5	4.0	2.5	φ 2.0	
WT-3-4	4.0	3.0	1.8	1.9	8.5	4.0	4.0	φ 2.0 [*1]	
WT-4-1	3.0	2.0	1.3	1.62	8.0	2.5	3.0	φ 1.6	P-7
WT-4-2	3.0	2.0	1.3	1.62	8.0	3.0	3.0	φ 1.6	
WT-4-3	3.0	2.0	1.3	1.62	8.0	3.5	3.0	φ 1.6	
WT-5-1	3.0	2.0	1.3	1.7	8.0	2.5	2.5	φ 1.8	
WT-5-2	3.0	2.0	1.3	1.7	8.0	3.0	2.5	φ 1.8	
WT-5-3	3.0	2.0	1.3	1.7	8.0	3.5	2.5	φ 1.8	
WT-6-1	3.0	2.0	S ₁ = 0.8	1.62	8.0	5.0	3.0	φ 1.6	P-7
WT-6-2	3.0	2.2	S ₁ = 1.0	1.62	8.0	5.0	3.0	φ 1.6	
WT-6-3	3.5	2.5	S ₁ = 1.2	2.02	8.0	5.0	3.0	φ 2.0	
WT-7-1	3.0	2.0	S ₁ = 0.8	1.7	8.0	5.0	2.5	φ 1.8	
WT-7-2	3.0	2.2	S ₁ = 1.0	1.7	8.0	5.0	2.5	φ 1.8	
WT-7-3	3.5	2.5	S ₁ = 1.2	1.9	8.0	5.0	2.5	φ 2.0	
WT-8-1	2.5	1.6	0.7	1.62	8.0	5.5	3.0	φ 1.6	P-5
WT-8-2	2.5	1.6	0.8	1.62	8.0	5.5	3.0	φ 1.6	
WT-8-3	3.0	2.0	1.0	1.62	8.0	5.5	3.0	φ 1.6	P-7
WT-8-4	3.0	2.0	1.2	1.62	8.0	5.5	3.0	φ 1.6	
WT-9-1	2.5	1.6	0.7	1.7	8.0	5.5	2.5	φ 1.8	
WT-9-2	2.5	1.6	0.8	1.7	8.0	5.5	2.5	φ 1.8	
WT-9-3	3.0	2.0	1.0	1.7	8.0	5.5	2.5	φ 1.8	
WT-9-4	3.0	2.0	1.2	1.7	8.0	5.5	2.5	φ 1.8	

*The press-fitting tool edge chip, P series, can not be used without the main unit, PCX-1
 *Without the press-fitting tool, you can insert the terminal by pushing it with your finger.

[*1] (for board thickness of t3.2)