



For insertion / removal of two-tiered type (two-row type) (Pitch: 2.54mm)

OYW series (10pcs/pack)

- This is used for mounting PC boards by two-tiered installation.
- Pitch: 2.54 mm, 32P (32P × 2) connected
- Material Pin: Brass, Finish: Gold plating over nickel base
Resin: PBT black (UL94V-0)
- Rated current : 3A
- Insulation resistance : 500M Ω or over
- Withstand voltage : 1000V AC,DC per minute
- Operating temperature range: - 40 to + 125℃
- Adaptive socket: PM-100, PM-1000

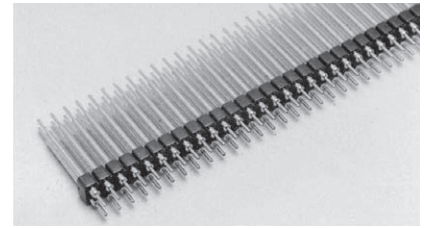


■ Example of usage

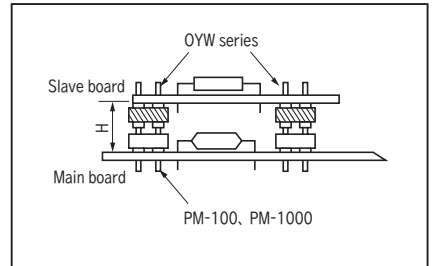


Part No.	A	B	H	Printed board fitting hole diameter
OYW-002	0.55	0	8.18	φ 0.8
OYW-003	1.2	1.82	10	
OYW-004	1.2	4.32	12.5	
OYW-005	1.2	6.82	15	
OYW-006	1.2	11.82	20	

* The dimension H indicates the distance between the main board and the slave board when PM-100, PM-1000 is used .

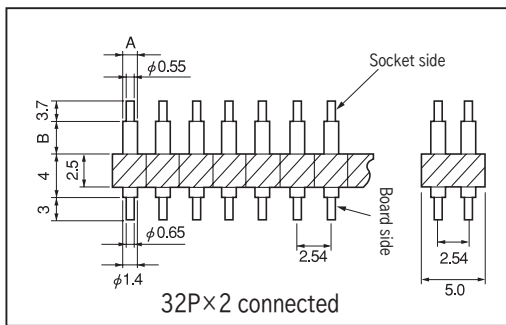

■ How to order:
OYW-002-10PW

Please fill in the number of poles on one side. (If the number of poles is not specified, we will deliver the maximum connected number, 32PW.)

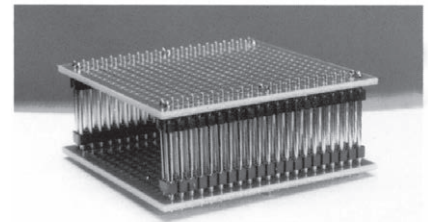


Angle type (Pitch: 2.54 mm)

Part No.: OZ-001 (10pcs/pack)

- This is used for putting PC boards at right angle.
- Pitch: 2.54 mm, 20 pins connected
- Please cut it to the desired number of poles by using a mold cutting nipper (Part No.: MOC-3)
- Material Pin: Brass, Finish: Gold plating over nickel base
Resin: PBT red (UL94V-0)
- Rated current : 3A
- Insulation resistance : 500M Ω or over
- Withstand voltage : 1000V AC,DC per minute
- Operating temperature range: - 40 to + 125℃
- Printed board fitting hole diameter: φ 0.8
- Adaptive socket: PM-1, PM-10



20P connected



■ Part No.: OZ-001

