

For insertion / removal of two-tiered type (Pitch: 2.54 mm)



OY series (10pcs/pack)

- This is used for mounting PC boards by two-tiered installation.
- Pitch: 2.54 mm, 20P connected
- Please cut it by using a mold cutting nipper (Part number: MOC-3)
- Material Pin: Brass, Finish: Gold plating over nickel base
Resin: PBT red, black (We offer two colors.) (UL94V-0)
- Rated current : 3A
- Insulation resistance : 500M Ω or over
- Withstand voltage : 1000V AC,DC per minute
- Operating temperature range: - 40 to + 125°C
- Adaptive socket: PD-1,PD-10,PM-1,PM-10



20P connected

■ Example of usage

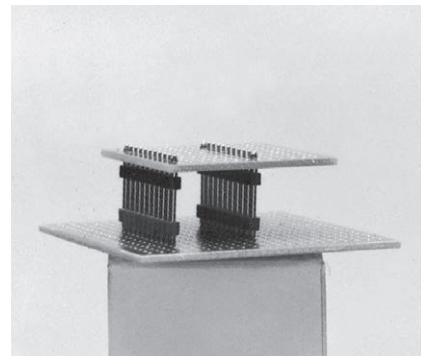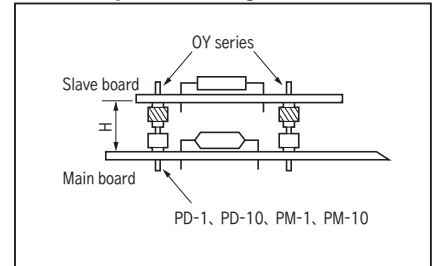


■ How to order:

OY-002 BLACK ← If this is not specified, RED will be specified.

Part No.	A	B	H	Printed board fitting hole diameter
OY-002	0.55	0	8.18	φ 0.8
OY-003	1.2	1.82	10	φ 0.8
OY-004	1.2	4.32	12.5	φ 0.8
OY-005	1.2	6.82	15	φ 0.8
OY-006	1.2	11.82	20	φ 0.8

* The dimension H indicates the distance between the main board and the slave board when PD-1, PD-10 or PM-1, PM-10 is used.

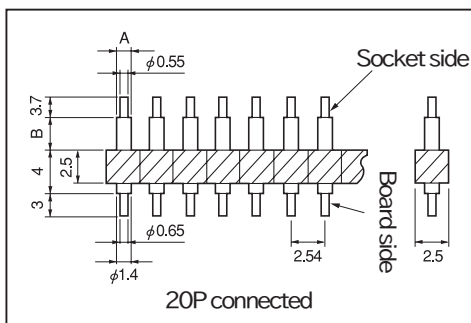

Please contact us when you need the number of poles larger than 20 pins connected.