


LED socket (for surface mounting)

Part No.: **LES-6-1**

- This socket is used for fitting a bullet-shaped LED to surface mounting board.
- Material Resin part: 46 nylon white (UL94V-0)
Metal part: Phosphor bronze
- Finish: Gold plating over nickel base
- Rated current: 2A
- Rated voltage: 48V AC, DC
- Insulation resistance: 500M Ω or over
- Withstand voltage: 1000V AC, DC per minute
- Contact resistance: 20m Ω or less
- Adaptive LED leg diameter: □0.5 2.54mm pitch
- Operating temperature range: - 40 to + 100°C




■ Example of usage

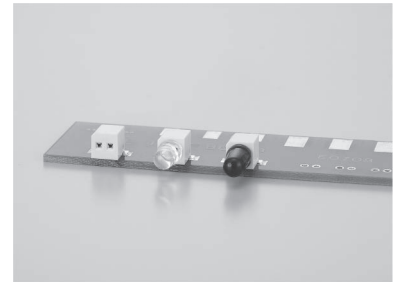

■ How to order

| Part No. | Package |
|-----------|--------------------|
| LES-6-1 | Bulk (10pcs/pack) |
| LES-6-1-T | Reel (200pcs/reel) |

■ Recommended land information



■ Dimension

