



Parallel connection electric wire type connector for surface mounting

Part No.: **KEO-3W-2P** (100pcs/pack)

- This connector is for supplying the power and signal line to a surface mounting board.
- The inserting socket is the Part number: KES-3R-2P.
- With a lock mechanism, it is not easily taken off.
- Material Resin part: 46 nylon white (UL94V-0)
Metal part: Phosphor bronze
- Finish: Gold plating over nickel base
- Rated current: 3A
- Rated voltage: 48V AC, DC
- Insulation resistance: 500M Ω or over
- Withstand voltage: 1000V AC, DC per minute
- Contact resistance: 20m Ω or less
- Insertion / removal durability : 50 cycles
- Operating temperature range: - 40 to +100°C
- Adaptive socket: KES-3R-2P

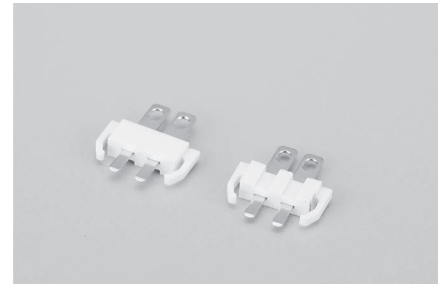

■ Example of usage

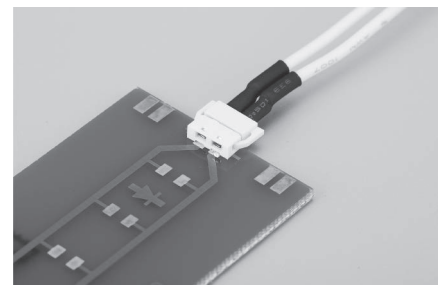


Combination of KEO-3W-2P and KES-3R-2P

■ How to order

Part No.: KEO-3W-2P

■ Dimension

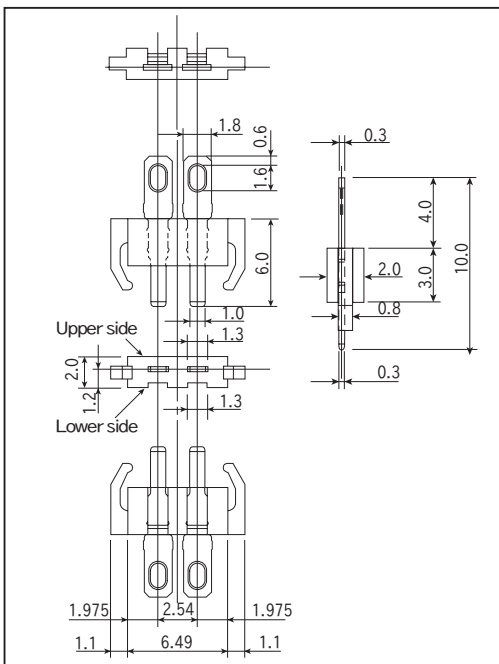

■ Instructions for use

- Please solder the electric wire which is thinner than the AWG22 and cover it with a shrinkage tube.
- As this product is small, it will be broken when the forces are applied upward and downward. Please prevent the forces from applying upward and downward.
- Please carry out soldering of the electric wire in a short time.

