



Wiring clip for surface mounting

CZ series

- Electric cable can be rotated to the side of POB.
- After reflow to the PCB, please place the cable into the clip.
- By making the clip narrower, it can be simplified.
- Material.....Brass
- Finish.....Tin plating over nickel base

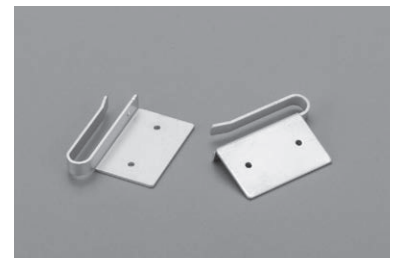


■ Example of usage

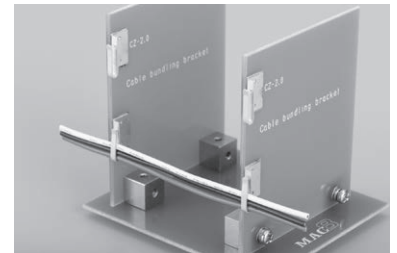


■ Part No.

Part No.	Package	Amount of storage for electric cable(reference)
CZ-2.0	Bulk (100pcs/pack)	In case of trunking diameter : ϕ 1.5, ϕ 3 cable max
CZ-2.0-T	Reel (600pcs/reel)	In case of trunking diameter : ϕ 1.0, ϕ 5 cable max
CZ-3.0	Bulk (100pcs/pack)	In case of trunking diameter : ϕ 2.5, ϕ 3 cable max
CZ-3.0-T	Reel (400pcs/reel)	In case of trunking diameter : ϕ 1.5, ϕ 5 cable max

■ Dimension

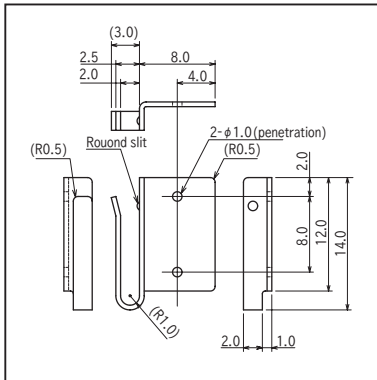


CZ-2.0

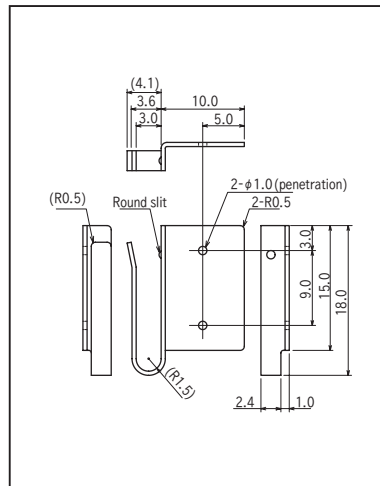


CZ-3.0

■ Recommended land information




CZ-2.0




CZ-3.0


■ CZ-2.0-T Reel dimension

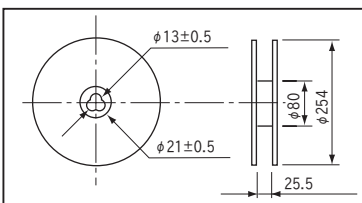

■ CZ-3.0-T Reel dimension

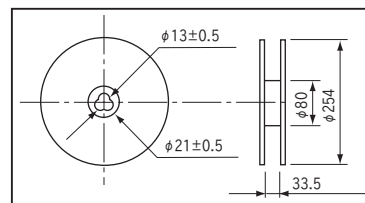

■ Tape dimension

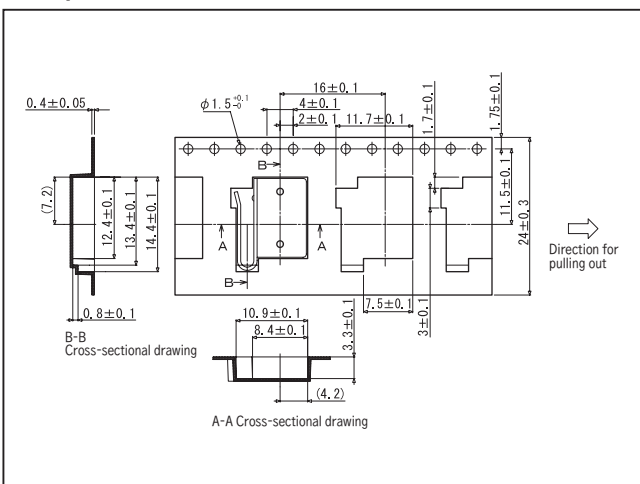

■ Tape dimension

